

ACROBAT™ 160



TECHNICAL SPECIFICATION:

Size range: 63mm - 160mm (2" - 6" nominal)

Piping & Materials: [See Welding Selection Chart](#)

Required Power: 120V/ 1Ph/ 15Amp

Dimensions: 24" x 15" x 14"

Shipping dimensions: 32" x 45" x 31"


Shipping Weight: 390 lbs.

FEATURES:

- Small footprint, lightweight
- Tool-less conversion from 4-jaw to 3-jaw carriage for tight work spaces
- Narrow jaws allow fusions for flanges to outlet branch of tees and most fittings
- Single insert design
- Removable upper jaws
- Hard anodized aluminum wear surfaces for corrosion resistance
- Low-power consumption
- DataLogger® compatible
- Premium shipping container serves as work surface
- Open-frame HPU design offers easy access for maintenance
- Microprocessor-controlled heater with anti-stick, Teflon-coated butt plates
- Includes inserts for 63mm, 75mm, 90mm, 110mm, and 125mm

OPTIONS:

- Use of the DataLogger® with the Acrobat™ series of tools will record the weld process from start to finish
- IPS inserts available for 2", 3", 4", 5", and 6"

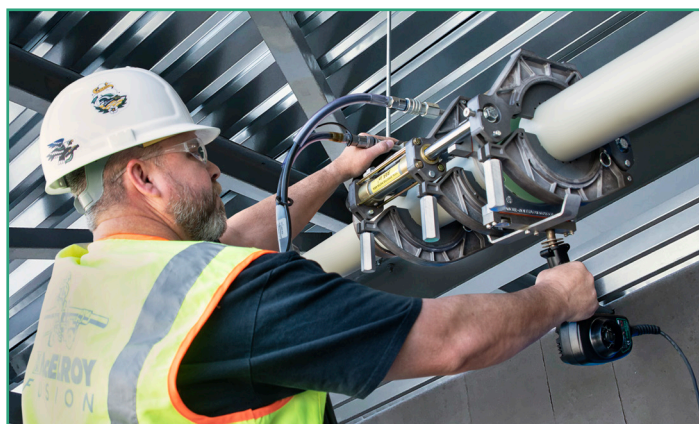

TOOL PURCHASE PART NUMBER: 5792000MC
TOOL RENTAL PART NUMBER: 9792000MC

Powered by

